



ERRELAB
crea in resina

Idroresina in pasta pronto uso per pavimenti e pareti

errefast

The collections of ErreLAB seamless floor and wall coatings in resin and cement offer ideas and designing solutions for defining and characterising in the best way modern spaces, which are the meeting point between personal style, architecture and cutting edge design.

ErreLAB floor and wall coatings are an ideal solution for all the living, working or public spaces, indoor or outdoor, new or to-be-renovated environments, as they embody a perfect balance between aesthetics and technical properties.

They can be applied both on cement and tile surfaces in environments of a traditional or modern design; thanks to a few millimetres of a high-technology material, spaces acquire a new, unique, peculiar, one-of-a-kind atmosphere.



errefast

Idroresina in pasta pronto uso per pavimenti e pareti
Ready to use water-based paste for walls and floors

*bello
facile
unico*


ERRELAB
crea in resina



smart solution

ErreFAST is the "system" with ErreLAB hydroresin paste, ready to use, to quickly create walls and floors with a minimal design. This innovative single-component compound allows to manage application phases in a more practical and fast way. It's enough to tint it in the required colour, and it's immediately ready to be applied with a trowel on any type of surface.



ErreLAB / crea in resina



ErreLAB / ErreFAST





ErreLAB / crea in resina

attraversa lo specchio

ErreFAST makes resin more approachable and reveals an entirely new world of chromatic and creative solutions. It's perfect for all those projects that require both easy application techniques and good technical characteristics of the product. ErreFAST offers a completely new practical approach to application techniques, that's why it's an ideal solution for users with little experience in this field and for users who explore the world of seamless surfaces for the first time.





materia

plasmabile


ErreFAST is available in two different textures.

R312 ErreFAST XL

Single-component ready-to-use paste in water dispersion for indoor applications; it is applied with a trowel and has a pronounced material texture. It can be tinted with the ErreLAB water-based tinting system.

R313 ErreFast FINE

Single-component ready-to-use levelling paste in water dispersion for indoor applications; it can be tinted with the ErreLAB water-based tinting system. It is applied with a trowel on ErreFAST XL; together they form a system with good mechanical characteristics, and the created coating is smoother than the highly textured XL surface.

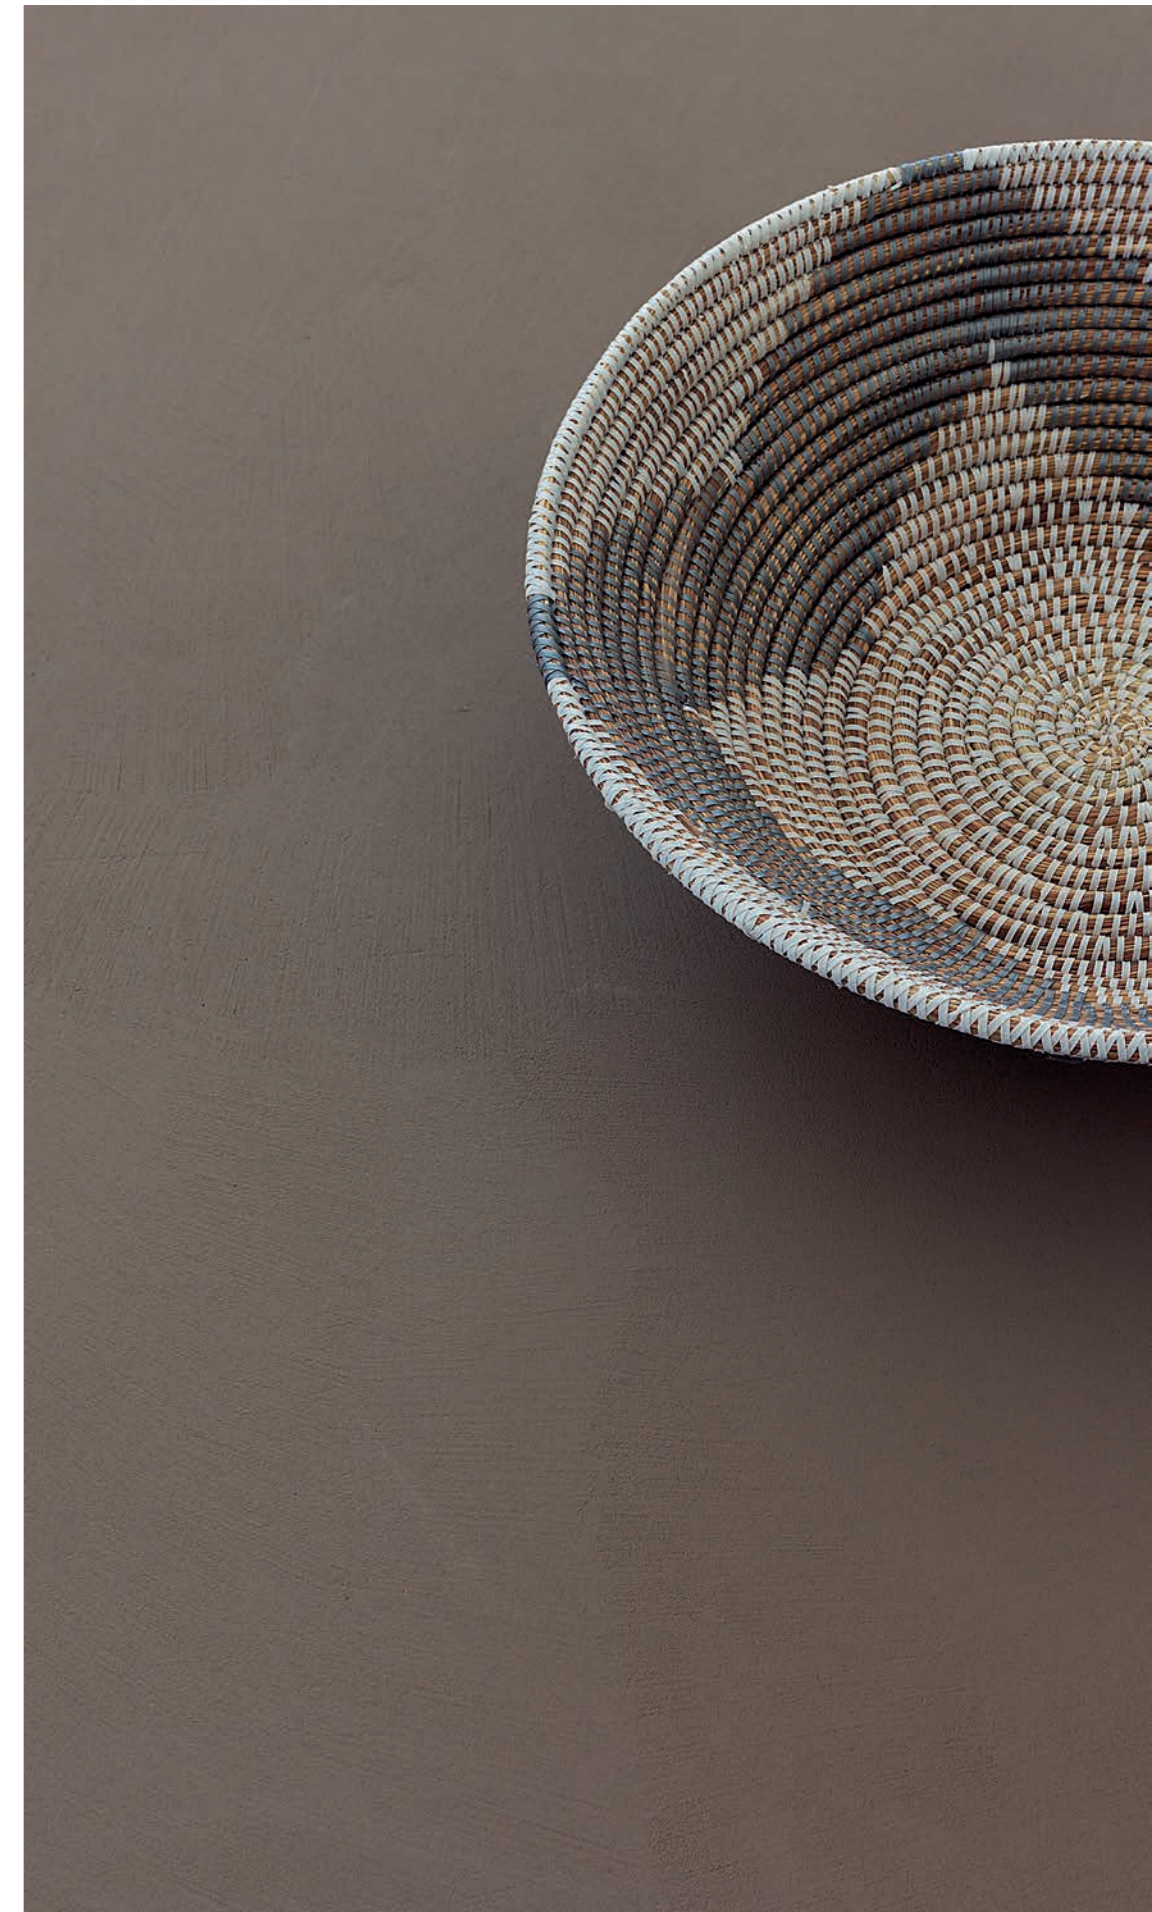

finiture +colori

It's possible to obtain highly customized chromatic results just playing with the colours of the ErreLAB colour chart and with endless possibilities of the tinting system. In order to give durability and long-lasting watertightness to the obtained surface, at the end of the procedure it's necessary to apply the transparent water-based finishing coating TOP-CLEAR (Glossy, Satin, Matt).



ErreLAB / crea in resina

ErreLAB / ErreFAST



Preliminary Check, Preparation

Preliminary Checks

During project planning it's necessary to thoroughly check the surfaces in order to estimate the level of absorption of the base layer, the presence of rising damp in it and the necessity of its reinforcement.

Mechanical preparation of the surfaces

It's necessary to completely remove the existing coating of cement surfaces by sanding them. Tile floors must be grinded with special diamond tools. Afterwards, in both cases the surfaces must be dusted.

Preliminary preparation measures

In case of tile surfaces with joints larger than 3 mm, highly impacted floors or surfaces exposed to water for a long time, please contact the ErreLAB Technical Assistance Service. In case of gypsum/drywall base layers or surfaces with a high level of absorption or rising damp, please follow the procedure described below. In all the other cases please follow the standard application cycle.

PREPARATION OF CEMENT FLOORS/WALLS WITH A HIGH LEVEL OF ABSORPTION

R 101 CEMENT PRIMER

1 coat
1 coat (next step, wet on wet).



TWO-COMPONENT (A+B)
Dilution: 300% water
Pot-life at 25°C: 105 min
Coverage: ~0,05 Kg/m²

PREPARATION OF GYPSUM/DRYWALL SURFACES

R 103 PRIMER GS

2 coats
(to be applied one after the other, without waiting for the 1st coating to dry)
For application use a roller or a brush.



SINGLE-COMPONENT
Dilution: ready to use
Pot-life at 25°C: NA
Coverage per coat: ~0,09 Kg/m²

PREPARATION OF CEMENT FLOORS OR TILES WITH RISING DUMP

R 204 ERRE-BLOCK ONE

1 coat
Application with a notched trowel



THREE-COMPONENT (A+B+C)
Dilution: ready to use
Pot-life at 25°C: 35 min
Coverage: ~2 Kg/m²

textured effect



Step 1

R 3 1 2 ERRE-FAST XL

FLOOR

2 coats on a cement surface

3 coats on a tile surface with joints smaller than 3 mm

(2 coats if the product R204 ERRE-BLOCK ONE has been applied)

WALL

1 coat on a cement or gypsum/drywall surface

3 coats on a tile surface with joints smaller than 3 mm

NOTE: Levelled application, it's necessary to add 2% of the tinting paste R731 ColorLAB of the required colour for each coat.



SINGLE-COMPONENT

Dilution: ready to use

Tool: stainless steel trowel

Pot-life at 25°C: NA

Application of the second

Coat at 25°C: 6/8 h

Re-coat at 25°C: 12/24 h

Step 2

R 5 3 X TOP-CLEAR

FLOOR / WALL • 1 or 2 coats

Sand the surface with an abrasive tool with 60-80 grit.

Application of a "combed" layer by a textile roller (10mm) in the desired type (Glossy, Satin, Matte).



TWO-COMPONENT (A+B)

Dilution: 10% water

Tool: microfiber roller (6 mm)

Pot-life at 25°C: 90 min

Re-coat at 25°C: 4/6 h

Coverage per coat: ~0,1 Kg/m²

Walkable at 25°C: 24 h

NOTE The colours created with R312 ErreFAST XL can have an approximate correspondence with the reference colour chart, due to the specific grain size of the product.

Notwithstanding the technical information on the products has been supplied with accuracy and thoroughness, it is intended that all the recommendations and suggestions imply no guarantee of the result, as working conditions are out of the manufacturer's control. The user is responsible for checking the applicability of the products for specific cases and use conditions. The colour and the final aesthetic result of a decorative effect depend on the operator's application skills. All the products indicated in the present document must be used and stocked at a nearly room temperature from 15°C up to 30°C. Store away from direct sunlight. Deep drying of the indicated application cycles takes approximately 7 days. The colours present in the brochure are the result of four-colour typographical printing, therefore they are to be considered indicative.

smooth effect



Step 1

R 3 1 2 ERRE-FAST XL

FLOOR

2 coats on a cement or gypsum/drywall surface

(1 coat if the product R204 ERRE-BLOCK ONE has been applied)

3 coats on a tile surface with joints smaller than 3 mm

(2 coats if the product R204 ERRE-BLOCK ONE has been applied)

WALL

1 coat on a cement or gypsum/drywall surface

3 coats on a tile surface with joints smaller than 3 mm

NOTE

Levelled application, it's necessary to add 2% of the tinting paste R731 ColorLAB of the required colour for each coat.



SINGLE-COMPONENT

Dilution: ready to use

Tool: stainless steel trowel

Pot-life at 25°C: NA

Application of the second

Coat at 25°C: 6/8 h

Re-coat at 25°C: 12/24 h

Step 2

R 3 1 3 ERRE-FAST FINE

Sand the surface with an abrasive tool with 36-80 grit.

FLOOR / WALL • 2 coats

NOTE: Levelled application, it's necessary to add 2% of the tinting paste R731 ColorLAB of the required colour for each coat.

ATTENTION: For light colours use PLASTIC TROWEL instead of stainless steel trowel.



SINGLE-COMPONENT

Dilution: ready to use

Tool: stainless steel trowel

Pot-life at 25°C: NA

Application of the second

Coat at 25°C: 6/8 h

Re-coat at 25°C: 12/24 h

Coverage per coat: ~0,5 Kg/m²

Step 3

R 5 3 X TOP-CLEAR

FLOOR / WALL • 1 or 2 coats

Sand the surface with an abrasive tool with 60-80 grit.

Application of a "combed" layer by a textile roller (10mm) in the desired type (Glossy, Satin, Matte).



TWO-COMPONENT (A+B)

Dilution: 10% water

Tool: microfiber roller (6 mm)

Pot-life at 25°C: 90 min

Re-coat at 25°C: 4/6 h

Coverage per coat: ~0,1 Kg/m²

Walkable at 25°C: 24h

Products

R312 ERRE-FAST XL

Single-component ready to use skim coat in water dispersion, based on special hydrophobic acrylic resins; it is usually used as a base coat for R313 ERRE-FAST FINE. The product is applied easily, and it's particularly recommended for thin-layer levelling of any type of surface, including ceramics, given that the surface has been duly prepared. The product rheology allows easy application, good long-lasting workability and, thus, obtainment of the desired aesthetic effect.

The product is versatile, highly breathable, and its film formation is fast even at medium and low temperatures. It can be tinted with suitable water-bases pastes.

Packaging	20 kg, 10 kg, 5 kg
Dilution	ready to use
Tool	stainless steel trowel
Application of the second coat at 25°C	4/6 h
Coverage per coat	1,0 kg/m ²

R313 ERRE-FAST FINE

Single-component ready to use skim coat in water dispersion, based on special hydrophobic acrylic resins. The product is easy to use, it's applied on R312 ERRE-FAST XL and is particularly recommended for the creation of thin-layer decorative effects. The product rheology allows easy application, good long-lasting workability and, thus, obtainment of the desired aesthetic effect.

The product is versatile, highly breathable, and its film formation is fast even at medium and low temperatures. It can be tinted with suitable water-based pastes.

Packaging	20 kg, 10 kg, 5 kg
Dilution	ready to use
Tool	stainless steel trowel
Application of the second coat at 25°C	6/8 h
Coverage per coat	0,5 kg/m ²

R53x TOP-CLEAR (A+B)

Two-component transparent finish created with water-based aliphatic polyurethane resins. Version: Glossy (Gloss 60°=85/95), Satin (Gloss 60°=25/35) Matte (Gloss 60°=5/10).

Depending on the surface roughness. As a top coating, it is applied with a roller in 1 or 2 layers using criss-cross "combed" strokes.

Packaging (A+B)	5 kg, 1 kg
Mixture/weight ratio	A=860, B=140
Dilution	10% water
Tool	microfiber roller (6 mm)
Pot-life at 25°C	90 min
Re-coat at 25°C	4/6 h
Walkable at 25°C:	24 h
Coverage per coat	0,1 kg/m ²

Colors selection

cartella colore / colour chart

				
RL-001 Mall	RL-002 Shop	RL-003 Store	RL-004 Court	RL-005 Hall
				
RL-006 Ambient	RL-007 Living	RL-008 Library	RL-009 Cave	RL-010 Lounge
				
RL-011 Salon	RL-012 Checkroom	RL-013 Bedroom	RL-014 Home	RL-015 Roof
				
RL-016 Lobby	RL-017 Room	RL-018 Open Space	RL-019 Stage	RL-020 Suburb
				
RL-021 Drawing Room	RL-022 Closet	RL-023 Studio	RL-024 Foyer	RL-025 Chalet
				
RL-026 Legal	RL-027 Industry	RL-028 First Floor	RL-029 Garage	RL-030 Groove
				
RL-031 Set	RL-032 Cigar Room	RL-033 Cottage	RL-034 Loft	RL-035 Office
				
RL-036 Castle	RL-037 Downtown	RL-038 Cover	RL-039 Gallery	RL-040 Land

colori / colors selection

WeAreColor / Home Design Color COLLECTION

					
421.05 Ruby	423.05 Tiger	425.05 Cathedral gray	427.05 Plum	429.05 Slate	431.05 Teal
					
421.04 Velvet	423.04 Peanut	425.04 Mauve taupe	427.04 Grape	429.04 Pewter	431.04 Pond
					
421.03 Bloom	423.03 Bone	425.03 Fashion gray	427.03 Wisteria	429.03 Silver	431.03 Cerulean
					
421.02 Rose	423.02 UNAVAILABLE	425.02 UNAVAILABLE	427.02 Cool gray	429.02 Grey	431.02 UNAVAILABLE
					
421.01 UNAVAILABLE	423.01 UNAVAILABLE	425.01 UNAVAILABLE	427.01 Light Lilac	429.01 UNAVAILABLE	431.01 UNAVAILABLE
					
421.01 Light rose	423.01 Light flesh	425.01 UNAVAILABLE	427.01 Light Lilac	429.01 UNAVAILABLE	431.01 Frost
					
422.01 Coconut	424.01 Oyster	426.01 UNAVAILABLE	428.01 Tulip	430.01 UNAVAILABLE	432.01 Artic
					
422.02 Canvas	424.02 Posy	426.02 Baby blossom	428.02 Dust	430.02 Sky	432.02 Winter mint
					
422.03 Camel	424.03 Dark flesh	426.03 Purple gray	428.03 Prune	430.03 Steel	432.03 Green gray
					
422.04 Caramel	424.04 Persian	426.04 Liquid mercury	428.04 Mauve	430.04 Royal blue	432.04 Dark sage
					
422.05 Brick red	424.05 Vermilion	426.05 Ash	428.05 Byzantium	430.05 Agate	432.05 Green blu

cartella colore / colour chart

					
433.05 Lagoon	435.05 Seal	437.05 Forest	439.05 Mocha	441.05 Sepia	443.05 Rust
					
433.04 Light sage	435.04 Rhino	437.04 Fern	439.04 Clay	441.04 Olive	443.04 Cider
					
433.03 Greenish	435.03 Pearl	437.03 Trout	439.03 Turtledove	441.03 Lace	443.03 Beige
					
433.02 Mint green	435.02 Natural gray	437.02 Pearl river	439.02 Cream	441.02 Salt	443.02 Powder
					
433.01 UNAVAILABLE	435.01 Chalk	437.01 UNAVAILABLE	439.01 UNAVAILABLE	441.01 UNAVAILABLE	443.01 UNAVAILABLE
					
433.01 Pale turquoise	435.01 UNAVAILABLE	437.01 Timid green	439.01 Sand	441.01 Eggnog	443.01 Ivory
					
434.01 UNAVAILABLE	436.01 Mint light	438.01 UNAVAILABLE	440.01 Rice	442.01 White coffe	444.01 UNAVAILABLE
					
434.01 Glimmer	436.01 Tea	438.01 Banana	440.01 Flaxen	442.01 Shadow	444.01 Butter
					
434.02 Dewy	436.02 Smoke green	438.02 Artichole	440.02 Hazel wood	442.02 Tortilla	444.02 Yellow
					
434.03 Sheer	436.03 Moss	438.03 Fossil	440.03 Smoke	442.03 Ginger	444.03 Spice
					
434.04 Sage	436.04 Laurel	438.04 Seaweed	440.04 Hazelnut	442.04 Dijon	444.04 Mustard



Cod. Prod. 9R981-0148-001



edizione - 05/2024

thanks to • Bonora Architecte - Paris



ERRELAB
crea in resina

ErreLAB S.r.l.

Via Volta, 45 • 10040 • Druento • TO • Italia

Tel. +39 011.9941831 • Fax 011.9841621

www.errelab.com - inforlab@errelab.com

